


Automatic battery chargers

For lead-acid batteries. Modular version



BCF...



a - constant current charge
b - constant voltage charge

Order code	Rated output current	Rated output voltage in DC	Qty per pkg	Wt
	[A]	[V]	n°	[kg]
1 charging level.				
BCF 0250 12	2.5	12	1	0.332
BCF 0450 12	4.5		1	0.332
BCF 0125 24	1.25	24	1	0.332
BCF 0250 24	2.5		1	0.332

Alarms	VDC ON GREEN LED	BAT LOW RED LED	RELAY
Correct output voltage	ON	OFF	Energised
Reverse polarity	ON	ON	Energised
Short circuit/ Overload	OFF	OFF	De-energised

Type	Maximum power consumption			Internal fuse mains side
	[VA]	[W]	[W]	[A]
BCF 0250 12	80	40	6	2ⓘ
BCF 0450 12	150	70	9	2ⓘ
BCF 0125 24	80	39	6	2ⓘ
BCF 0250 24	150	77	9	2ⓘ

ⓘ Not replaceable.

General characteristics

- Switching technology
- Wide auxiliary supply range
- Screw fixing or 35mm DIN rail mount (IEC/EN 60715).

Protection:

- Mains input fuse
- Battery output fuse
- Electronic lock in case of short circuit on battery terminals, reverse battery polarity and output overload
- Automatic reset at end of alarm conditions.

LED indications:

- Correct output voltage
- Reverse battery polarity.

Operational characteristics

- Auxiliary supply voltage
 - 100-240VAC ±10% 50/60Hz ±5%
- Fixed charging current
- Current limitation
- Charging current according to DIN 41773 standards
- Fixed clamping screw terminal block with captive screws
- IEC degree of protection: IP20.

Alarm output circuit

- Type of output: 3A 250VAC AC1 duty relay, normally energised.


Certifications and compliance

Certifications obtained: EAC; UL Recognized for USA and Canada (cURus - File E360865), as Power Supplies - Component.
Products having this type of marking are intended for use as components of complete workshop-assembled equipment.
Compliant with standards: IEC/EN 60950-1, IEC/EN 61000-6-2, IEC/EN 61000-6-3, UL 60950-1, CSA C22.2 n°60950-1.

For non-sealed and sealed lead-acid batteries



BCG...



a - constant current charge
b - constant voltage charge

Order code	Rated output current	Rated output voltage in DC	Qty per pkg	Wt
	[A]	[V]	n°	[kg]
1 charging level.				
BCG 06 12	6	12	1	0.532
BCG 12 12	12		1	0.710
BCG 05 24	5	24	1	0.532
BCG 10 24	10		1	0.710
Accessories.				
BCG X00	Adapter for DIN rail vertical mount of BCG 06 12 and BCG05 24		1	0.022

Alarms	ON GRN LED	REV RED LED	ALA RED LED	CHG YEL RED	RELAY
Correct output voltage	ON	OFF	OFF	OFF	Energ.
Charging	ON	OFF	OFF	ONⓈ	Energ.
Low battery voltage	ON	OFF	ON	ONⓈ	Energ.
Reverse polarity	OFF	ON	OFF	OFF	De-energ.
Short circuit / Overload	ON	OFF	ON	OFF	De-energ.

Ⓢ Steady light if the charging current is more than approx. 30% of programmed current value.

Ⓢ Flashing during Hiccup operating conditions.

Type	Maximum power consumption			Internal fuse Mains side (type T)
	[VA]	[W]	[W]	[A]
BCG 06 12	230	97	14	4ⓘ
BCG 12 12	284	290	29	6.3
BCG 05 24	364	158	20	6.3ⓘ
BCG 10 24	630	311	41	8

ⓘ Not replaceable.

General characteristics

- Switching technology
- Wide auxiliary supply range
- High efficiency
- Two charging voltages selectable by DIP-switch
- Boost external control for full battery charging
- Hiccup function for battery recharging when its voltage is lower than 50% rated value
- Charging current limiting trimmer resistor
- Screw fixing or 35mm DIN rail mount (IEC/EN 60715).

Protection:

- Input fuse on AC side
- Electronic lock in case of short circuit on battery terminals, reverse battery polarity and output overload
- Automatic reset at end of alarm conditions.

LED indications:

- Power on
- Charging operation (>30% Ic)
- Overload or short circuit conditions
- Reverse battery polarity.

Operational characteristics

- Auxiliary supply voltage: 110-240VAC ±10% 50/60Hz ±10%
- Charging voltage selectable by DIP-switch
 - Non-sealed lead-acid batteries
 - Sealed lead-acid batteries
- Maximum charging current setting by front potentiometer: 20-100% rated value
- Current limitation
- Charging cycle according to DIN 41773 standards
- IEC degree of protection: IP20.

Alarm output circuit

- Type of output: 5A 30VDC duty relay, normally energised.

Certifications and compliance

Certifications obtained: EAC; UL Recognized for USA and Canada (cURus - File E360865), as Power Supplies - Component.
Products having this type of marking are intended for use as components of complete workshop-assembled equipment.
Compliant with standards: IEC/EN 60950-1, IEC/EN 61000-6-2, IEC/EN 61000-6-3, UL 60950-1, CSA C22.2 n°60950-1.

For lead-acid batteries




31 BCE 0312
31 BCE 2V524



31 BCE 0612
31 BCE 0524



31 BCE 1212
31 BCE 1024



a - constant current charge
b - constant voltage charge


Order code	Rated output current [A]	Rated output voltage in DC [V]	Qty per pkg n°	Wt [kg]
1 charging level.				
31 BCE 0312	3	12	1	1.984
31 BCE 0612	6		1	4.832
31 BCE 1212	12		1	8.690
31 BCE 2V524	2,5	24	1	1.992
31 BCE 0524	5		1	4.960
31 BCE 1024	10		1	9.560

Type	Maximum power consumption [VA]	dissipation [W]	Mains fuse (type) [A]
	BCE 0312	117	24
BCE 0612	222	46	4 (F) int
BCE 1212	400	73	6.3 (F) int
BCE 2V524	166	26	1 (T) ext ❶
BCE 0524	317	40	4 (F) int
BCE 1024	610	66	6.3 (F) int


❶ Not supplied; installed by customer.

DERATING CURVES


BCE 2V5 - BCE 03

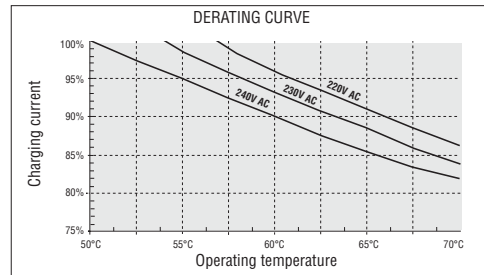

BCE 05 - BCE 06

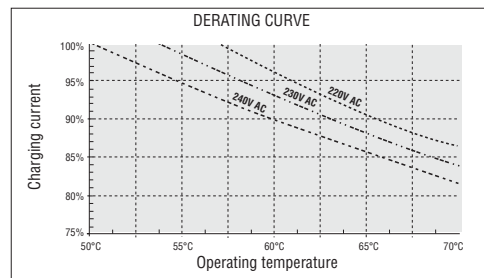

BCE 10 - BCE 12

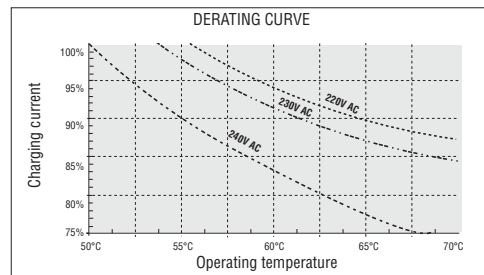

General characteristics

- Linear technology
- Housing for internal panel mounting by screws.
- Protection:
 - Mains input fuse (except for BCE 2V5 and BCE 03)
 - Battery output fuse
 - Electronic lock in case of short circuit on battery terminals, reverse battery polarity, output overload (<math><0.5 U_e</math>) and disconnected battery.

LED Indications:

- Power on
- Charge ($I > 0.2 I_c$)
- Alarm for protection tripping.

Operational characteristics

- Auxiliary supply voltage: 220-240VAC $\pm 10\%$, 50/60Hz $\pm 5\%$
- Charging current: 30-100% I_e adjustable
- Charging cycle according to DIN 41773 standards
- Current limitation
- Clamping screw terminal block with captive screws:
 - Removable for BCE 03 and BCE 2V5
 - Fixed for BCE 05, BCE 06, BCE 10 and BCE 12
- IEC degree of protection: IP00.

Alarms

Possible causes of alarm include:

- Low battery voltage
- Battery fuse blown
- Battery not connected
- Battery polarity inverted (reverse polarity).

BCE 2V524 - BCE 0312

These types have a static alarm output for the control of a relay or indicator, maximum 300mA duty.

If it is connected to a relay, this must be normally energised in absence of alarm. In alarm conditions with ALARM LED switched on or in absence of supply, the relay de-energises.

BCE 0524 - BCE 0612 - BCE 1024 - BCE 1212

These types have a normally energised relay alarm output. In alarm conditions with ALARM LED switched on or in absence of supply, the relay de-energises.

Alarm output circuit

BCE 2V524 - BCE 0312

- Type of output:
 - Negative static; NPN transistor ❶
 - Maximum voltage applicable to load: +V battery terminal
 - Maximum output current: 300mA
 - Maximum overload current for 1 second: 2A
 - Dynamic over-voltage protection with inductive load.

BCE 0524 - BCE 0612 - BCE 1024 - BCE 1212

- Type of output
 - Relay: 1 changeover contact (SPDT)
 - Rated voltage: 250VAC
 - IEC rated capacity in AC1 duty: 5A 250VAC I_{th}
 - IEC rated capacity in DC13 or DC14 duty: 5A 30VDC
 - Electrical life: $>10^6$ cycles
 - Mechanical life: $>30 \times 10^6$ cycles.


❶ The output is not overload or short-circuit protected. It is however capable of switching on a 3W filament bulb.

Certifications and compliance


Certifications obtained: EAC.

Compliant with standards: IEC/EN 60335-2-29.


BCF...

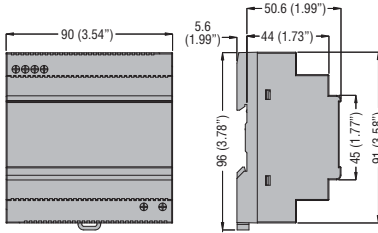


BCG 0612 - BCG 0524

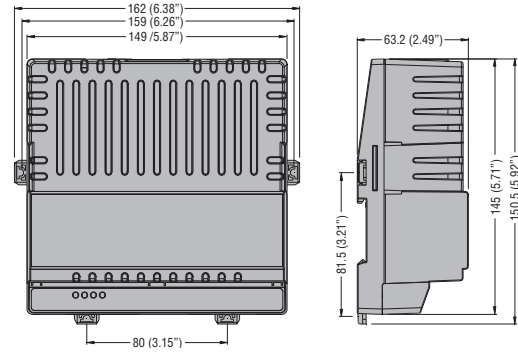


Mounting adapter BCG X00

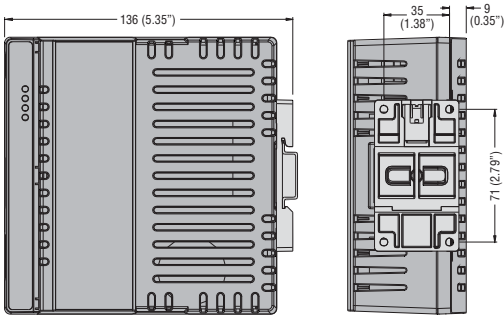


BCG 1212 - BCG 1024

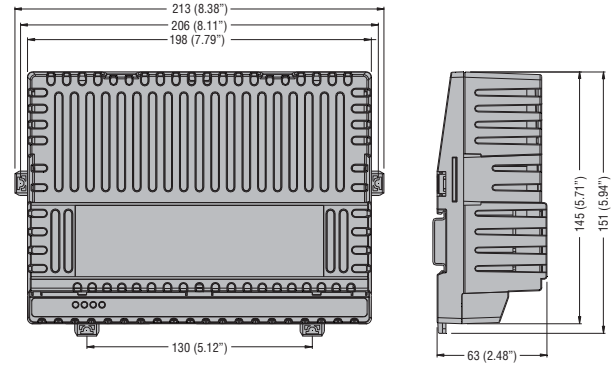


BCE 0312 - BCE 2V524

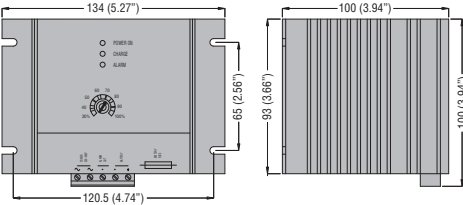

BCE 0612 - BCE 0524

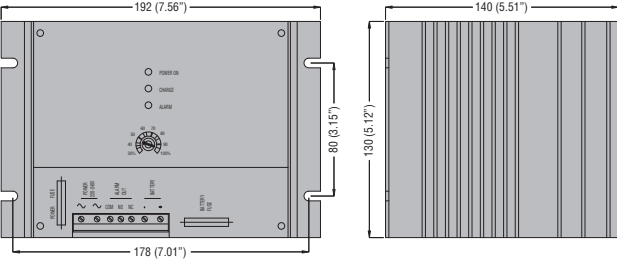


BCE 1212 - BCE 1024

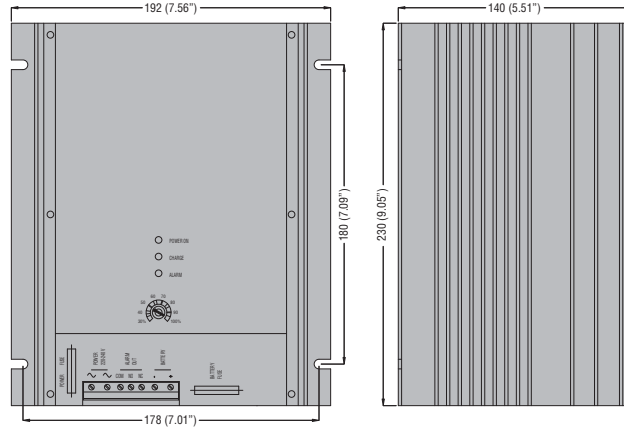


Wiring diagrams


BCF...




BCG...



BCE 2V5... - BCE 03...



BCE 05... - BCE 06... - BCE 10... - BCE 12...

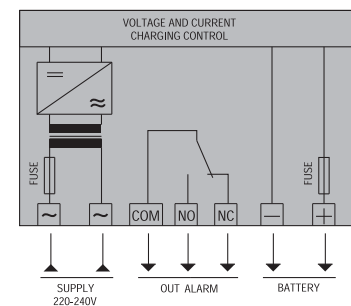

TYPE	BCG...	BCF...	BCE...
Description	Single phase automatic battery charger 1 charging level for sealed and non-sealed lead-acid batteries	Single phase automatic battery charger 1 charging level for lead-acid batteries	
Supply voltage	110-240VAC $\pm 10\%$ 50/60Hz $\pm 10\%$	100-240VAC $\pm 10\%$ 50/60Hz $\pm 5\%$	220-240VAC $\pm 10\%$ 50/60Hz $\pm 5\%$
Rated output voltage (Uoc)	12-24VDC		
Rated charging current (Ic)	6-12A (12VDC) 5-10A (24VDC)	2.5-4.5A (12VDC) 1.25-2.5A (24VDC)	3-6-12A (12VDC) 2.5-5-10A (24VDC)
CHARGING CYCLE			
Reference standards	DIN 41773		
Diagram	<p>a - constant current charge b - constant voltage charge</p>		
End charging voltage U _c	12V battery with DIP2: – in pos. V1: 13.8V – in pos. V2: 13.5V (default). 24V battery with DIP2: – in pos. V1: 27.6V – in pos. V2: 27.0V (default)	12V battery: 13.6VDC (2.27V/cell) 24V battery: 27.2VDC (2.27V/cell)	12V battery: 13.8VDC (2.3V/cell) 24V battery: 27.6VDC (2.3V/cell)
Charging current	Adjustable 20% to 100% I _c (using potentiometer/trimpot)	Fixed	Adjustable 30% to 100% I _c (using potentiometer)
Current limit	Yes		
Boost	+4.4% U _c	—	—
PROTECTION			
	<ul style="list-style-type: none"> – Mains supply fuse – Charging inhibition due to: <ul style="list-style-type: none"> • Short circuit at battery terminals • Reverse battery polarity • Low voltage at battery poles (<0.5 U_{oc}) • Output overload 	<ul style="list-style-type: none"> – Mains supply fuse – Charging inhibition due to: <ul style="list-style-type: none"> • Short circuit at battery terminals • Reverse battery polarity • Low voltage at battery poles (<0.5 U_{oc}) • Output overload 	<ul style="list-style-type: none"> – Mains supply fuse (5, 6, 10, 12A types only) – Battery output fuse – Charging inhibition due to: <ul style="list-style-type: none"> • Short circuit at battery terminals • Reverse battery polarity • Low voltage at battery poles (<0.5 U_{oc}) • Disconnected battery
ALARM OUTPUT CIRCUIT			
Type of output	1 relay 5A 30VDC	1 relay 3A 250VAC AC1	Static (NPN transistor) ❶; relay with 1 c/o contact (SPDT), 5A 250VAC ❷
AMBIENT CONDITIONS			
Operating temperature	-30...+55°C (+55...+70°C with 1-5%I _c /°C derating by trimpot)	-40...+51°C	-10...+50°C
Storage temperature	-30...+80°C	-40...+85°C	-30...+80°C
HOUSING			
Version	Internal panel mount	Modular	Internal panel mount
IEC degree of protection	IP20	IP20	IP00
Cooling	Natural		
Connections	Fixed terminals	Fixed terminals	Removable/plug-in terminals❶ Fixed terminals❷

❶ For 2.5A and 3A types only.

❷ For 5, 6, 10 and 12A types only.

www.LovatoElectric.com

LOVATO ELECTRIC S. P. A.

VIA DON E. MAZZA, 12
24020 GORLE (BERGAMO) ITALY

Tel +39 035 4282111
Fax +39 035 4282200
E-mail info@LovatoElectric.com

Sales Department:
Tel. +39 035 4282354
Fax +39 035 4282400



LOVATO Electric offices in the world

United Kingdom

LOVATO ELECTRIC LTD
Tel. +44 8458 110023
www.Lovato.co.uk

Germany

LOVATO ELECTRIC GmbH
Tel. +49 7243 7669370
www.LovatoElectric.de

Spain

LOVATO ELECTRIC S.L.U.
Tel. +34 93 7812016
www.LovatoElectric.es

Poland

LOVATO ELECTRIC SP. Z O.O.
Tel. +48 71 7979010
www.LovatoElectric.pl

Turkey

LOVATO ELEKTRIK LTD
Tel. +90 216 5401426-27-28
www.LovatoElectric.com.tr

Romania

LOVATO ELECTRIC SRL
Tel. +40 372 074 155
www.LovatoElectric.ro

Czech Republic

LOVATO ELECTRIC S.R.O.
Tel. +420 226 203203
www.LovatoElectric.cz

USA

LOVATO ELECTRIC INC.
Tel. +1 757 5454700
www.LovatoUsa.com

Canada

LOVATO ELECTRIC CORP.
Tel. +1 450 6819200
www.Lovato.ca

United Arab Emirates

LOVATO ELECTRIC ME FZE
Tel. +971 4 3712713
www.LovatoElectric.ae

China

LOVATO ELECTRIC (SHANGHAI) CO LTD
Tel. +86 21 62961837
www.LovatoElectric.cn

LOVATO Electric products are available in over 100 countries through its distributors

The products described in this publication are subject to be revised or improved at any moment. Catalogue descriptions and details, such as technical and operational data, drawings, diagrams and instructions, etc., do not have any contractual value. In addition, products should be installed and used by qualified personnel and in compliance with the regulations in force for electrical systems in order to avoid damages and safety hazards.